

## AT-01 Electric Chain Actuator



- Suitable for top / center-pivoted / hopper window , casement window , heavy skylight and glass –curtain wall open or closing ; Simple but delicacy design
- Optional installation ;
- Use double link chain that works more stable and smooth ;
- Electronic overload cutoff;
- Endurance tests (30,000 cycles ) are carried out ;
- Various strokes and color can be tailor-made ;



Specifications	Units	Technical Data	
		AT-01( DC )	AT-01(AC )
Thrust / Relay	N	250N	250N
Maximum operating current	A	1.0	0.4
Travel distance	mm	50~400	50~400
Promote the speed of	mm/sec	~10	~10
Operating voltage	V	DC24V ± 10%	AC220V ± 10%
Ambient temperature	°C	-20~+75	-20~+75
Protection class	IP	32	32

## Dimensions

Distance L(mm)	DC24V A(mm)	AC230V A(mm)
200	330	460
300	380	510
350	405	535
400	430	560
500	480	610

DC:A=L/2+230\AC:A=L/2+360

## Installation

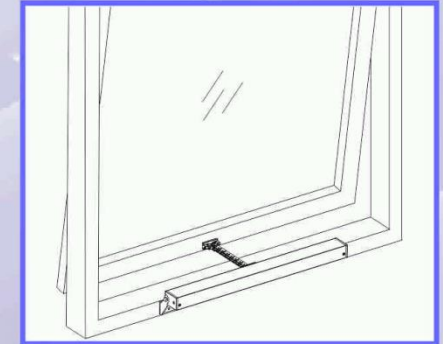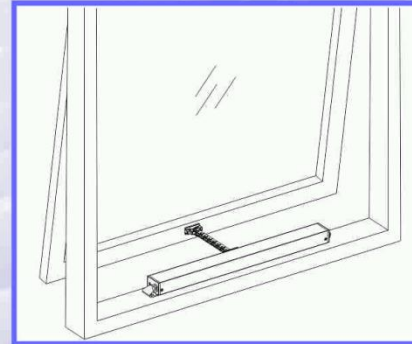

## Job Reference

